



## TAKE CONTROL WITH AN ALL-SOLID, HIGH-TEMP WAREWASHING SYSTEM

### Apex™ HT Dishmachine





- ▲ High temperature dishmachine design with onboard booster heater delivers superior results.
- ▲ Integrated Apex system tracks operational efficiency.
- ▲ Energy Star rating helps reduce operating costs.

Solid Apex products deliver unsurpassed cleaning results and greater convenience – through lightweight, compact, non-caustic formulas that help you control cost and waste.



# Superior Results, 24/7 Service and a Great Financial Option.

## SPECIFICATIONS

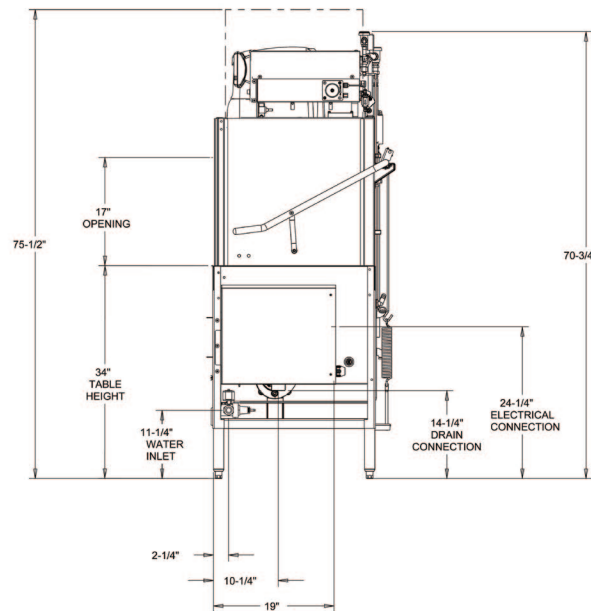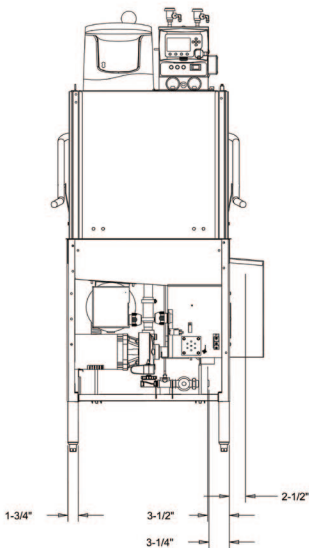

## PRODUCTS FOR USE IN THE APEX HT MACHINE



**Apex Power Dishmachine Detergent**  
17063 4-6.75 lb  
17062 6-6.75 lb



**Apex Power Plus Dishmachine Detergent**  
17091 4-6.75 lb



**Apex Ultra Dishmachine Detergent**  
17051 4-6.75 lb



**Apex Chlorine Free Machine Detergent**  
16811 2-2.5 lb  
6100021 1-2.5 lb



**Apex Rinse Additive**  
16811 2-2.5 lb  
6100021 1-2.5 lb



**Apex Heavy Duty Rinse Additive**  
16818 2-2.5 lb

## SPECIFICATIONS

OPERATING CAPACITY		
Racks per Hour	57	
OPERATING CYCLE NORMAL		
Wash Time	46	
Dwell Time	2	
Rinse Time	10	
Load Time	5	
Total Cycle Time	63	
OPERATING TEMPERATURES		
Wash (minimum)	150°F	
Sanitizing Rinse (minimum)	180°F	
WATER CONSUMPTION		
Gallons per Rack	0.83	
ELECTRICAL RATINGS		
Wash Pump Motor, Horsepower	3/4 hp	
WASH CHAMBER		
Height	17"	
WEIGHT		
Machine Weight	340 lb	
UTILITY REQUIREMENTS, ELECTRICAL		
	Power Connection	
	Single	Multiple*
Voltage/Frequency/Phase: 240V/60Hz/1 Ph		
Total Amperage	88.4 A	58.3/30.1 A
Minimum Electrical Circuit	90 A	70/35 A
Voltage/Frequency/Phase: 240V/60Hz/3 Ph		
Total Amperage	54.1 A	33.7/20.4 A
Minimum Electrical Circuit	60 A	40/25 A
Voltage/Frequency/Phase: 208V/60Hz/3 Ph		
Total Amperage	62 A	39/23 A
Minimum Electrical Circuit	70 A	45/25 A
Voltage/Frequency/Phase: 208V/60Hz/1 Ph		
Total Amperage	101.4 A	67.3/34.1 A
Minimum Electrical Circuit	110 A	80/35 A
WATER		
Waterline Size (minimum)	1/2"	
Flow Pressure (required)	15-25 psi	
Incoming Temperature (minimum)	110°F	
DRAIN		
Drainline Size (minimum)	1-1/2"	
VENT HOOD		
Flow-Cubic Feet per Minute	400	

\* Booster/Machine



370 Wabasha Street N St. Paul, MN 55102  
www.ecolab.com 1 800 35 CLEAN

©2013 Ecolab USA Inc. All rights reserved. 41503/0403/0113