A New Standard in Clean.

ELT Dishmachine

- ▲ Low-temp machine provides exceptional one-pass wash results with water and energy efficiency.
- Recirculating design with 60-second cycle time enables water, energy and labor savings while achieving outstanding results.
- ✓ Intuitive user interface promotes a positive user experience with decreased labor and training costs.


▲ Ecolab chemistry is uniquely positioned for superior results every time. The new, re-imagined, recirculating design helps drive more efficient water and labor use while providing the best results so you can do more with less.







ECOLAB DISHMACHINE RENTAL PROGRAM


The highest level of clean backed by service you can trust.







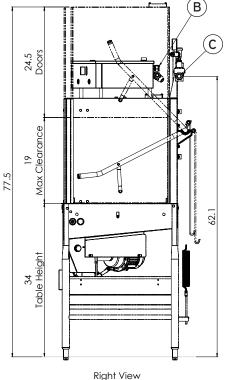

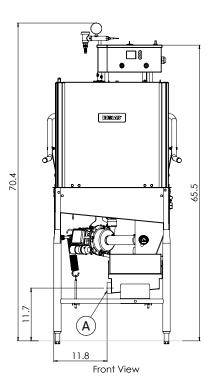

ELT SPECIFICATIONS OPERATING CAPACITY

Racks per Hour	54
OPERATING CYCLE (LIGHT)	
Total Cycle Time	77
OPERATING CYCLE (NORMAL)	
Wash Time Dwell Time Rinse Time Load Time Total Cycle Time	50 1 11 5 67
OPERATING TEMPERATURES	

Wash (minimum) 120° F Sanitizing Rinse (min) 120° F

WATER CONSUMPTION

Gallons per Rack 0.83 gal/rack

ELECTRICAL RATINGS

Wash Pump 1hp

WASH CHAMBER

Height 19"

WEIGHT

Machine Weight 197 lbs

UTILITY REQUIREMENTS ELECTRICAL

Voltage/Frequency/Phase: 115 V/60 Hz/1 Ph

Total Amperage 12 A Minimum Electrical Circuit 15 A

WATER

1/2" (NPT) Waterline Size (min) Flow Pressure (required) 15-25 psi Incoming Temperature (min) 120° F **Incoming Temperature** 140° F (recommended)

DRAIN

Drainline Size (minimum)

C - Water Inlet All dimensions from floor are adjustable +/- 1/2" due to bullet feet.



A - Drain Connection **B** - Electrical Connection

> SIMPLE ON-DEMAND TRAINING VIDEOS TO SUPPORT OPERATIONS.

Scan code to access training library.

Contact your **Ecolab Representative** or call **1 800 35 CLEAN** for more information.











2"